

Vibro-band

ANTIVIBRATION BAND FOR SKIRTING-BOARDS OF FLOATING WOODEN FLOORS

APPLICATIONS

Vibro-BAND is used as an antivibration intermediate band between skirting boards and the floating wooden floors. By using **Vibro BAND**, sound and vibration passage through the skirting is prevented.

DESCRIPTION

The antivibration profile **Vibro-band** is produced of special synthetic rubber.

Its innovative design ensures:

- Easy installation.
- Prevention from possible sound - bridge.
- Waterproofing of the floor.
- Firm installation between skirting-board and wooden parquet.



It is an essential accessory in wooden nailed floors, when used with the antivibration mounts **Vibro-FM** or **Vibro-FS** in order to prevent lateral transmitted vibration.

INSTALLATION INSTRUCTIONS


During the installation of the parquet an appropriate gap, must be kept, in order to avoid sound-bridge, between parquet and wall (4 - 8 mm).

Place Vibro-band in the gap by pressing it. It is easily fastened, due to its flaps, but if it is necessary, its upper part can be nailed onto the wall.

Finally place the skirting-board on the Vibro-band.

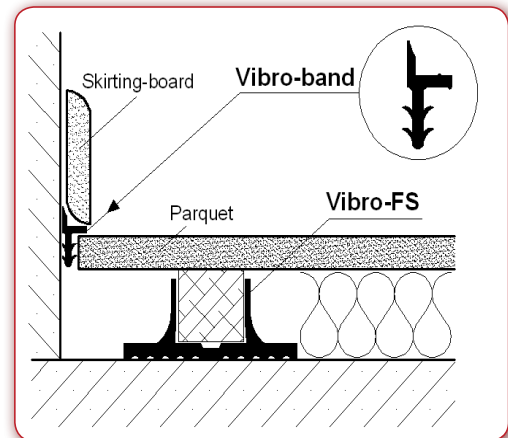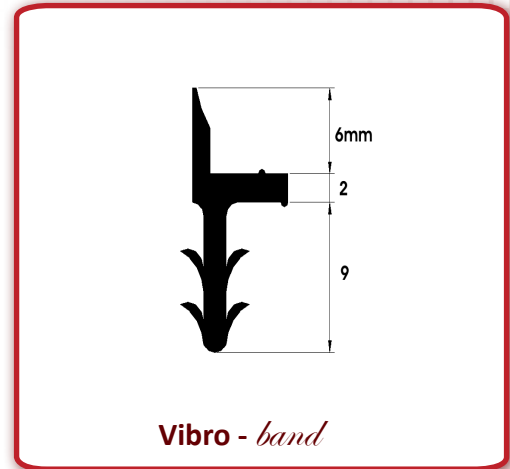

Section view of a parquet antivibration solution

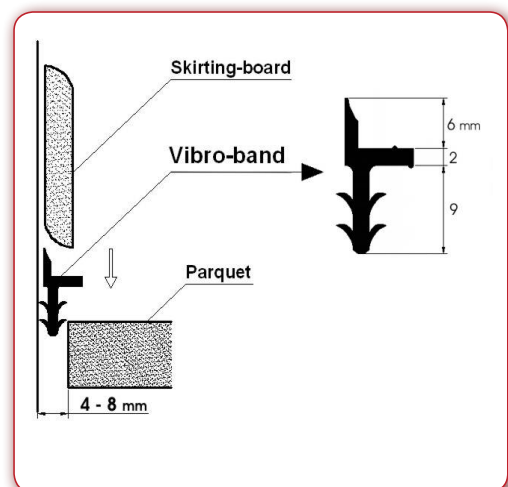

Design and production according to International Standards ISO 9001.2000.

ALPHA ACOUSTIKI LTD

73 Apostolopoulou St. Chalandri 15231 Greece

T: +30 210 6779875 - F: +30 210 6779269

www.vibro.gr - info@vibro.gr