




### RSIC-WHI

The **RSIC-WHI** is designed for use with any wood, steel or concrete application where a dropped drywall ceiling is required. The RSIC-WHI isolator installed mid-wire between the structure and a drywall grid ceiling, or CRC and hat channel ceiling. The RSIC-WHI Isolator has acoustical design load ratings of 30, 50, 70, 100, 145, and 220 lbs per isolator.

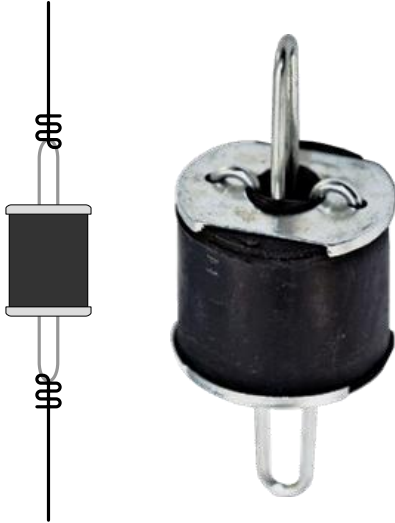

Blue 30 Brown 50 Green 70 Red 100 White 145 Yellow 220




#### RSIC-1, the Low Cost, High Performance, Noise control Solution

Wood
Steel
Metal Deck

Steel
Condo
Commercial

Apartment
Retail
Conference Rooms

Recording Studio
Home Theater
Commercial theater

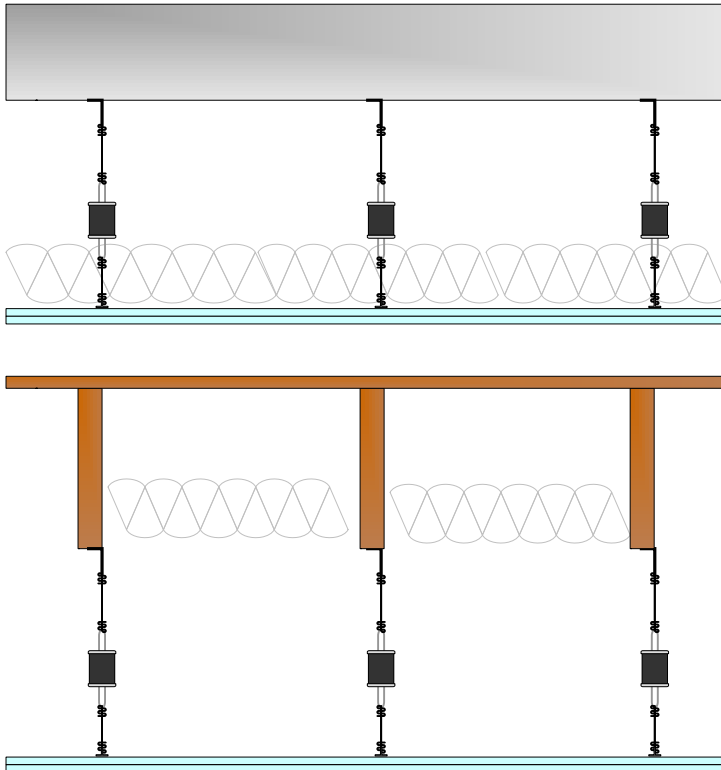

RSIC-1 specifications:	
Acoustical design load:	15 to 220 Lbs
Total deflection	3 mm
Double deflection	N/A
Low VOC treated	Yes
Adjustable	Yes
Cavity min	4"
Cavity Max	No limit
Adjustment limit	Wire length
Use on Ceilings	Yes
Use on walls	No
New Construction	Yes
Retro Fit	Yes