




### RSIC-1 ADM Side Mount



The **RSIC-1-ADM Side Mount** clip designed for use with open web steel truss applications where noise control is required. The RSIC-1-ADM Side Mount isolator is a labor saving adjustable mount for steel truss. Hammer on the clip and spin the isolator to adjust up and down for a level ceiling. Secure the side mount with two strands of 18 Ga wire. With an Acoustical design load rating of 36 lbs per isolator, the RSIC-1-ADM Side Mount clip can support up to two layers of 5/8" gypsum board when spaced at 24" x 48" oc., and 3 layers when spaced at 16" x 48" oc. The RSIC-1-ADM Side Mount clip attaches directly to the side of the steel truss decoupling the gypsum board from the structure stopping STC and IIC vibrations from entering the space below.


### **RSIC-1, the Low Cost, High Performance, Noise control Solution**

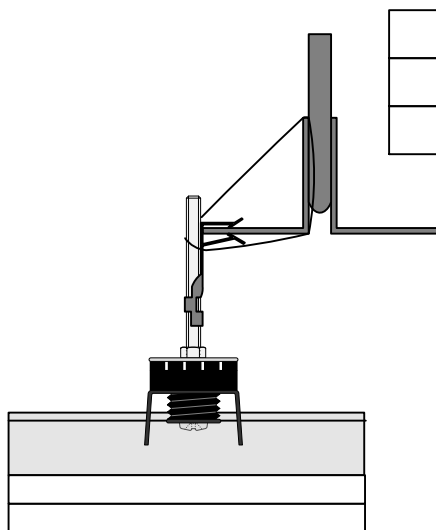

Steel
Condo
Commercial

Apartment
Retail
Conference Rooms

Recording Studio
Home Theater
Commercial theater

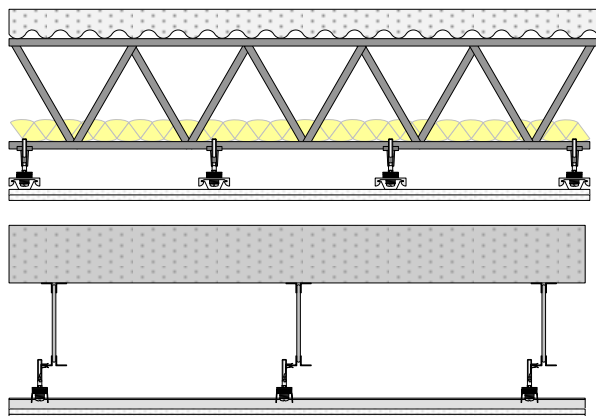

#### RSIC-1-ADM Side Mount specifications:

Acoustical design load:	36 Lbs
Total deflection	3 mm
Double deflection	Yes (1.5 mm)
Made with Recycled content	Yes
Cryo low VOC treated	Yes
Adjustable	Yes
Cavity min	1-3/4"
Cavity Max	Up to 12"
Adjustment limit	Threaded Rod
Use on Ceilings	Yes
Use on walls	No
New Construction	Yes
Retro Fit	Yes